



HVLS ECO 18


Brought to you by ZOO Fans™

POWER & EFFICIENCY

| | | | |
|----------------------------|---|--|---------------------------|
| INPUT POWER OPTIONS | AC 1PH 200-240V 50/60Hz AC 3PH 200-240V 50/60Hz AC 3PH 380-480V 50/60Hz | | |
| CURRENT AT MAX SPEED (Amp) | 4.9 - 4.2 A | | 2.6 - 2.3 A 2.0 - 1.7 A |
| POWER (hp) | 5/8 HP | | |
| MAXIMUM SPEED (RPM) | 78 RPM | | |
| MAX AFFECTED AREA | 90 ft Dia 8,100 sqft | | |

DIMENSIONS & WEIGHT

| | |
|--------------|-----------------|
| FAN DIAMETER | 18 ft |
| FAN WEIGHT | 138 lbs (62 kg) |

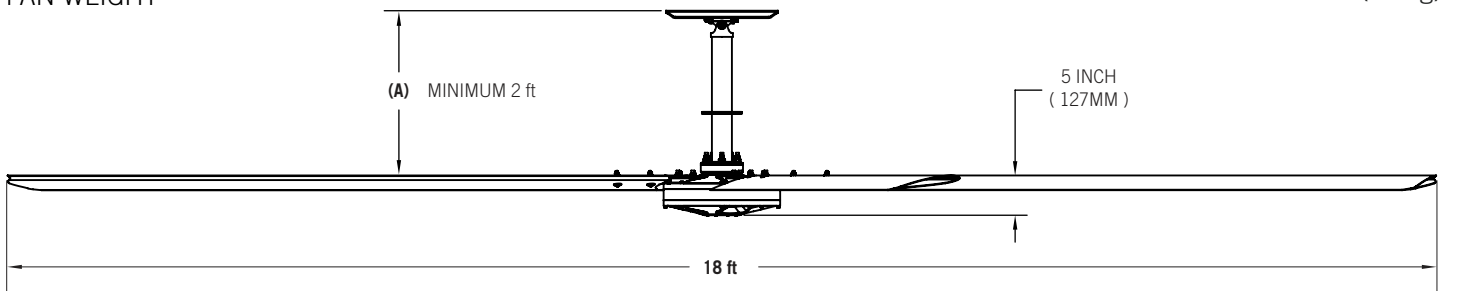

Pictured with 2 ft downrod

MOUNTING & SAFETY

| | |
|---|--|
| MOUNTING OPTIONS | I-beam Glulam |
| DOWNROD (A) Standard downrod is 3 ft | Downrods available in 1 ft increments: 2 ft min., 10 ft max. Downrod length must be specified at time of order. |
| SAFETY FEATURES | Fan Retention System Airfoil Retention System Fire relay |

IN THE BOX

| | |
|----------|---|
| INCLUDED | Fan I-beam mount with pre-wired downrod Control panel Install manual Wall Control Mounting hardware kit Communication Kit Guy wire kit |
| OPTIONAL | Additional cable lengths Network Controller Glulam brackets |

WARRANTY & CERTIFICATIONS

| | |
|-----------------------|--|
| CERTIFICATIONS | ETL/Intertek-certified to ANSI/UL 507 and CSA C22.2 No. 113 in North America |
| WARRANTY ¹ | 10-year, Non-Prorated Warranty |

¹See complete warranty for details.